Summary

This report describes the Department of Water and (the department) compliance with Ministerial conditions and commitments under *Ministerial statement no. 819 – Gnangara Mound groundwater resources [including East Gnangara Shire of Swan]* (Government of Western Australia 2009) for the period 1 July 2021 to 30 June 2022, under Part IV of the *Environmental Protection Act 1986* (EP Act).

The

1 Background

1.1 Ministerial statement no. 819

Ministerial statement no. 819: Gnangara Mound groundwater resources [including East Gnangara Shire of Swan] (Government of Western Australia 2009) establishes the environmental conditions and commitments associated with the allocation of groundwater from the Gnangara groundwater resources north of Perth for public and private use. As the proponent, the department must comply with and report on the conditions to the EPA each year.

The Department of Water, the Department of Environment Regulation and the Office of the Environmental Protection Authority merged in July 2017 to form the Department of Water and Environmental Regulation. To ensure there is no possible apprehension of bias, the Director General of the department is not involved in monitoring compliance with *Ministerial statement no. 819*. The Executive Director, Compliance and Enforcement has been formally delegated to exercise the compliance duties under the EP Act.

Some of the key conditions in *Ministerial statement no. 819* are environmental water provisions set as water level criteria at 30 representative sites across the Gnangara groundwater resources 14 wetland sites and 16 terrestrial phreatophytic vegetation sites (Figure 1). Phreatophytic vegetation uses groundwater to meet at least part of its water needs. On the Swan Coastal Plain, native vegetation that occurs within 10.5 m depth to groundwater is considered likely to be phreatophytic.

The conditions and commitments on Gnangara groundwater resources were first

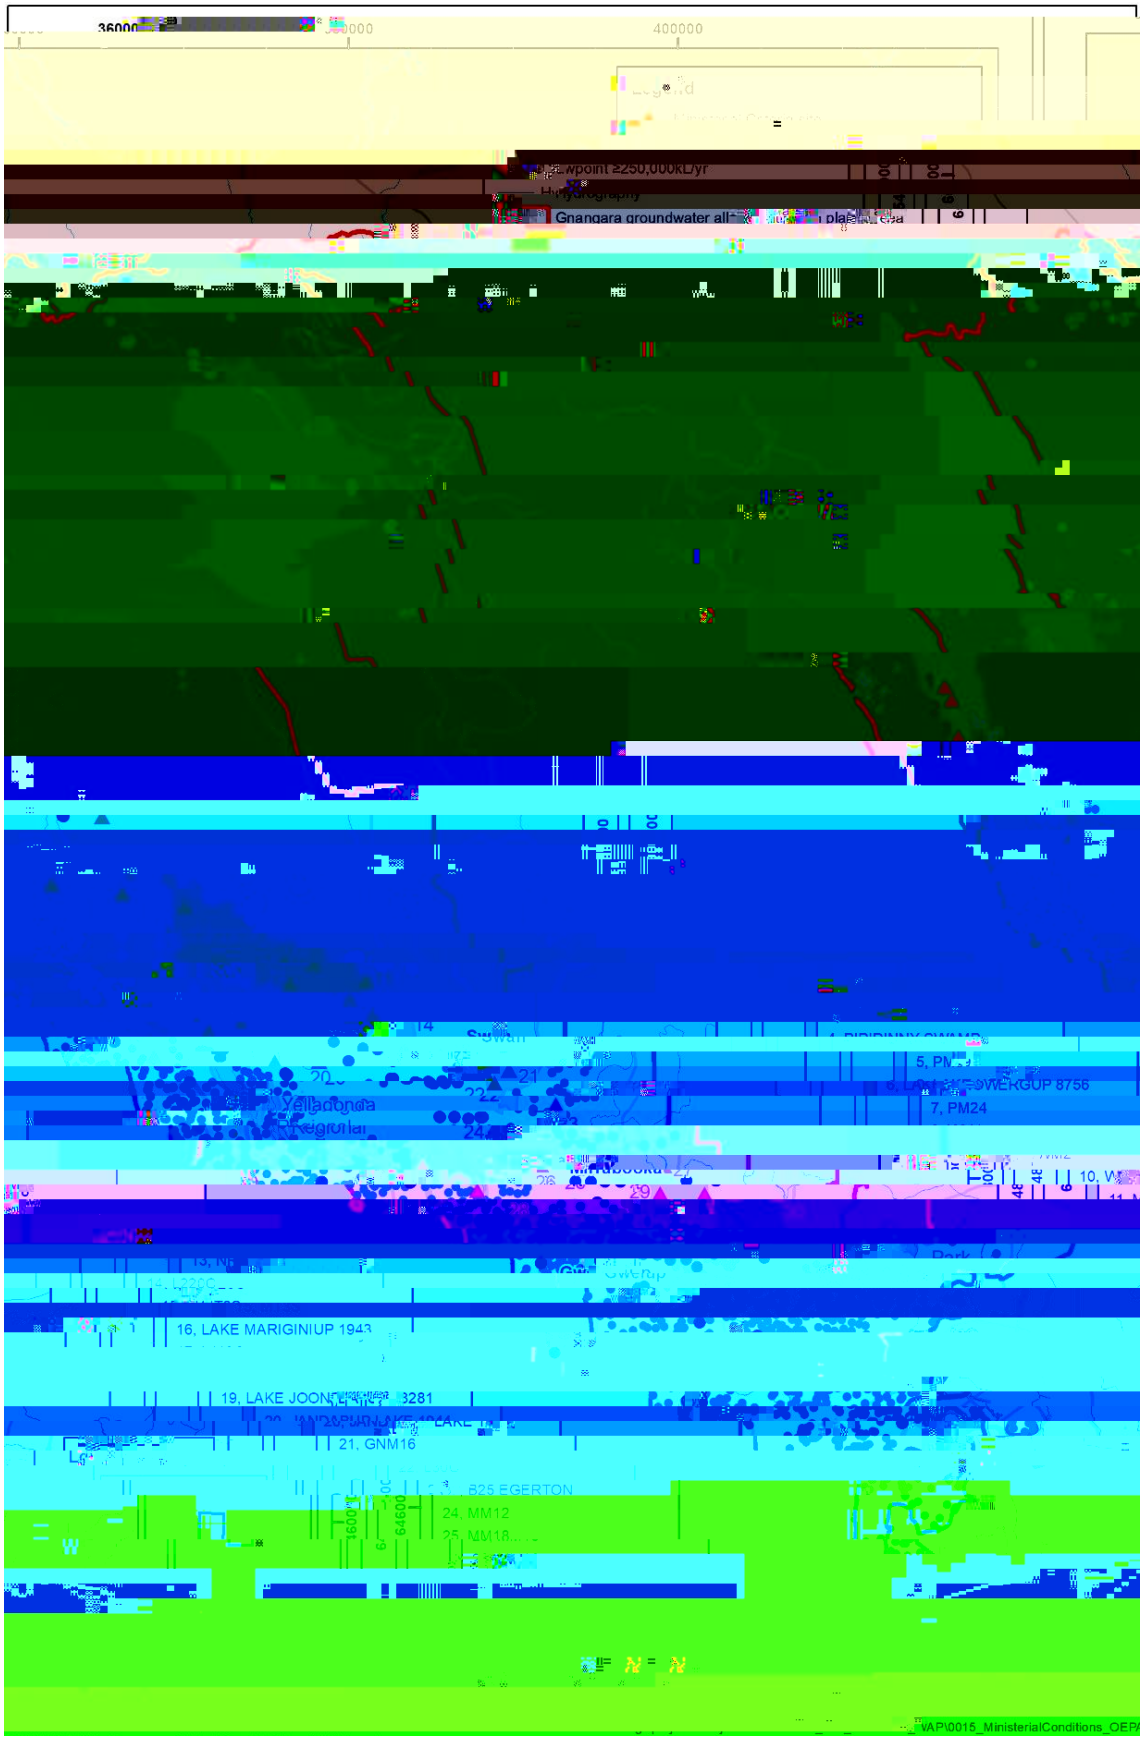

Figure 1 *Location of Gnangara water level criteria sites, public water supply production bores and drawpoints of private licences with larger entitlements*

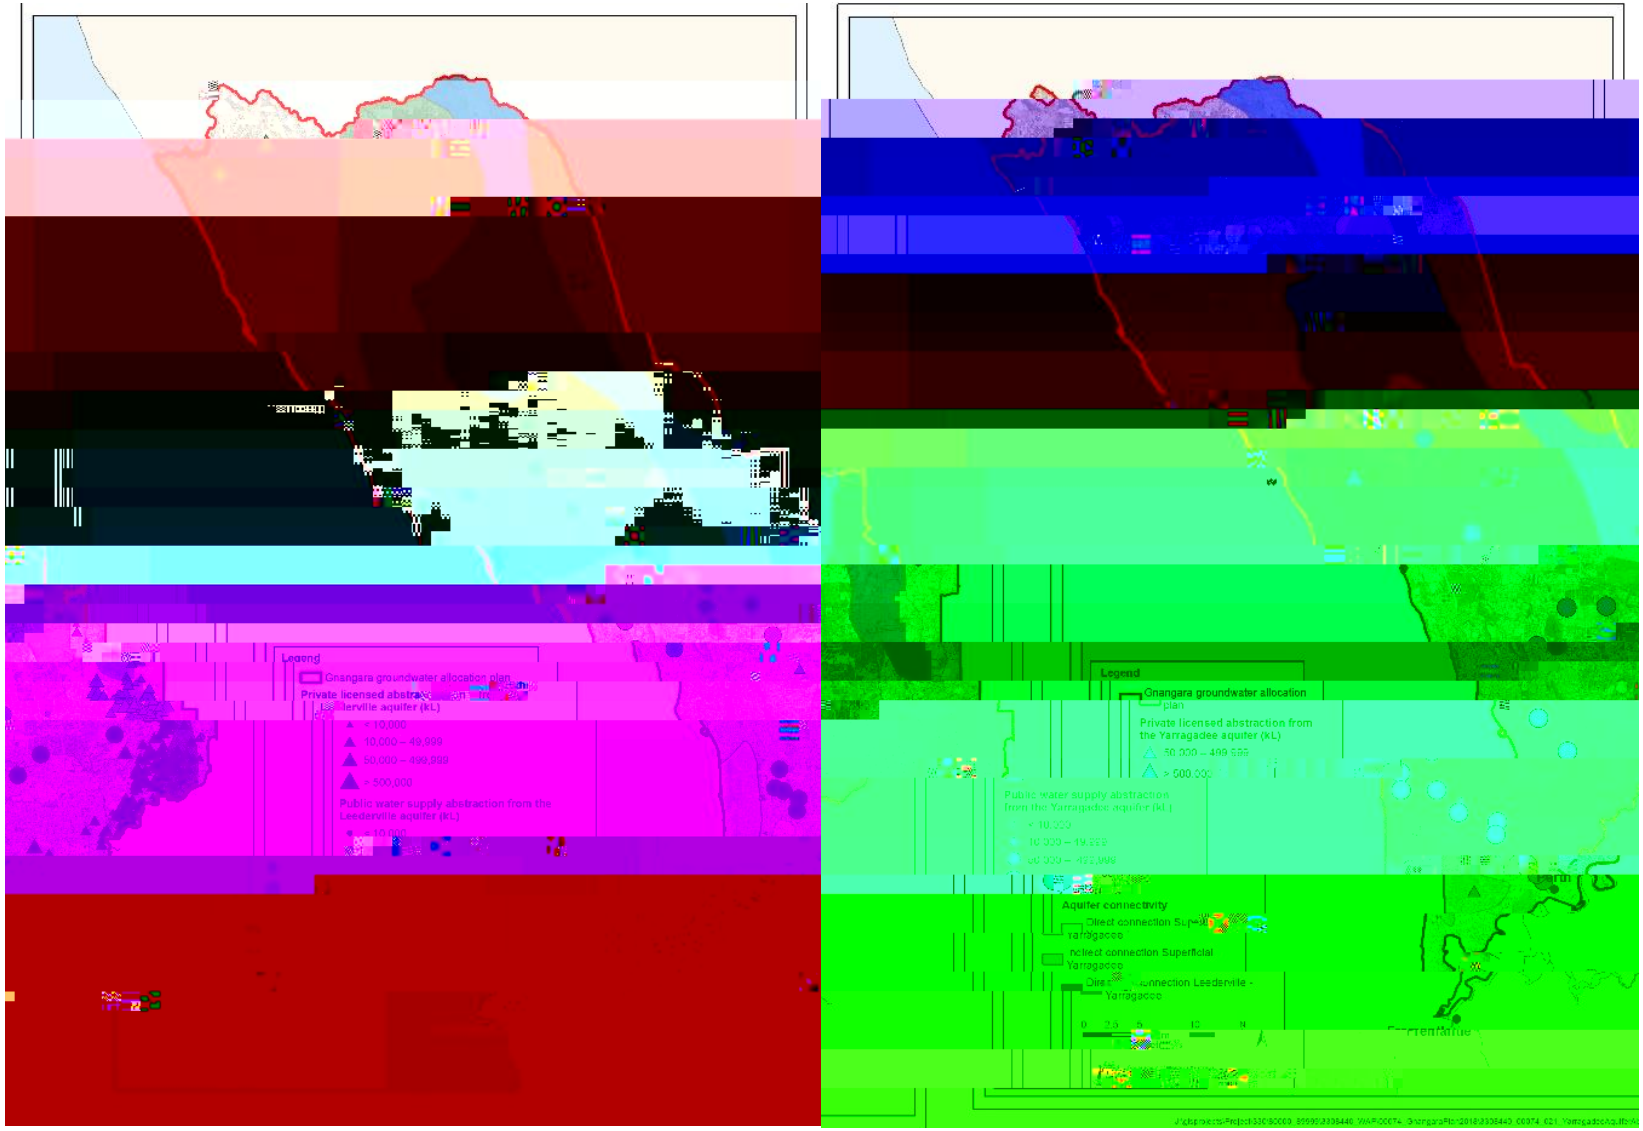

Figure 2 Groundwater connectivity of the Leederville (left) and Yarragadee (right) aquifers, with abstraction locations and volumes

2 Rainfall

Groundwater is recharged by rainfall. How much groundwater levels rise and fall each year is affected by the amount of rainfall that falls in the catchment, but also by how it falls (timing, pattern and intensity). Recharge is also affected by temperature warmer weather will increase evaporation and allow less rainfall to reach the aquifer.

The climate across south-west Western Australia is changing. There has been a general trend of declining annual rainfall since the mid-1970s. Average temperatures have also risen. This trend is predicted to continue with outputs from new state-of-the-art climate models under the Coupled Model Inter-comparison Project phase 5 (CMIP5) and 6 (CMIP6) projecting that the future climate for south-west Western Australia will continue to become warmer and drier (Grose et al. 2020).

Rainfall at the Perth Airport BoM station over the reporting period was 688.8 mm. An unusually large monthly rainfall of 262.8 mm was received in July 2022, the highest since records started in 1945. Despite this, rainfall was well below the long-term (75 year) average of 756 mm and similar to the short-term (10 year) average of 671.5 mm (Figure 3).

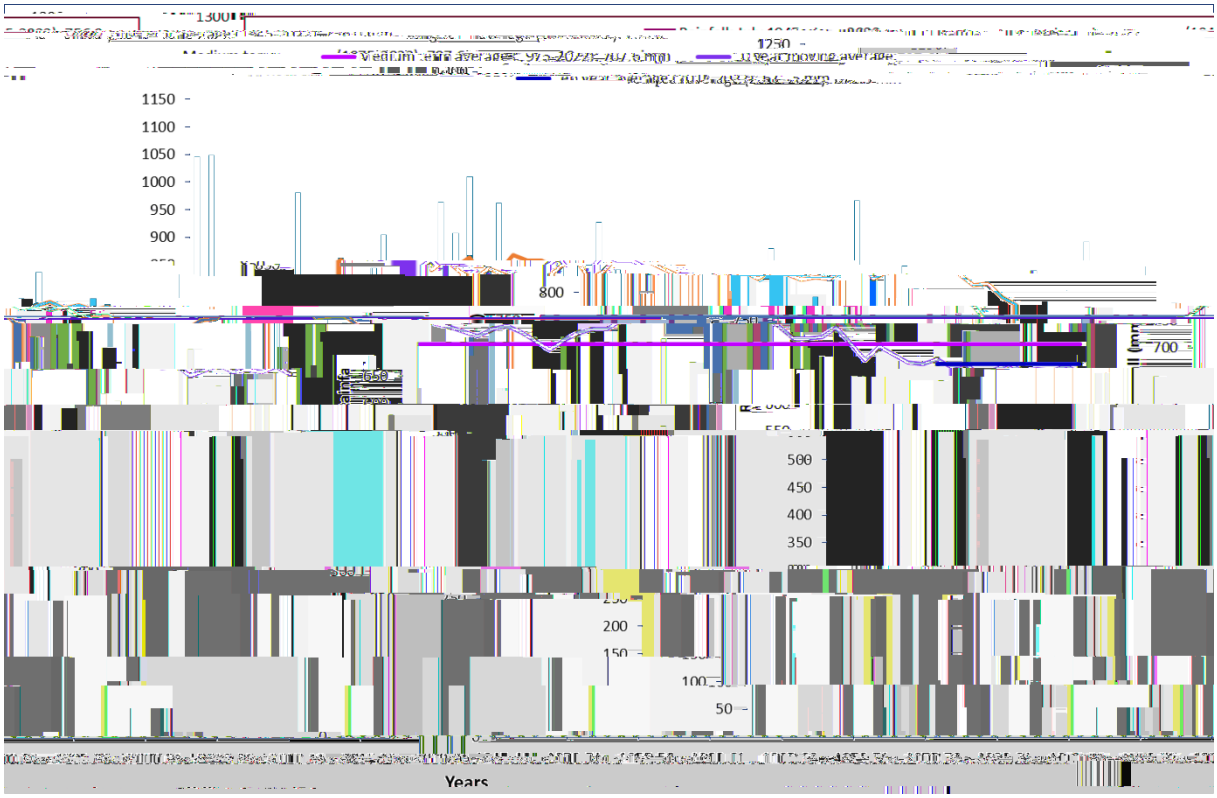

Figure 3 Annual and average water-year (July–June) rainfall at Perth Airport (BoM site no. 9021)

3 Groundwater use

The Gnangara groundwater system is the Perth

Table 4 Summary of non-compliance with water level criteria for Gnangara groundwater resources for the reporting period

Non-compliant sites[1]				
Absolute minimum or peak water level criteria			**Other water level criteria**	
Wetlands	**Terrestrial vegetation**	**Total non-compliant**	**Wetlands**	**Total non-compliant**
2020–21				
Loch McNess Lake Yonderup Lake Mariginiup Lake Jandabup Lake Nowergup Lake Wilgarup Pipidinny Swamp Lexia 186 Melaleuca Park EPP173	MM53 MM55B MM59B PM9 WM1 WM2 WM8	16 out of 30	Lake Mariginiup Lake Nowergup Lexia 86 Lexia 186 Melaleuca Park Dampland 78	5 out of 8

5 Environmental monitoring, management, research and consultation

5.1

Wetland macroinvertebrates and water quality

Over the reporting period macroinvertebrates and water quality were monitored in spring to coincide with peak water levels at Loch McNess, Lake Yonderup, Lake Nowergup, Lake Joondalup, Lake Jandabup, Lake Mariginiup, Lake Goollelal, Melaleuca Park EPP173, Lake Gwelup and Lake Gnangara. The surveys showed:

groundwater, and well-

Wetland	AWRC reference number	Water level criteria (mAHD)				Water level (mAHD)									Status and comments on compliance during the 2021 ±22 annual reporting period
		Spring peak		End of summer minimum			2012 ± 13	2013 ± 14	2014 ± 15	2015 ± 16	2016 ± 17	2017 ± 18	2018 ± 19	2019 ± 20	2020 ± 21	
		Pref	Abs	Pref	Abs											

Wetland	AWRC reference number	Water level criteria (mAHD)				Water level (mAHD)										Status and comments on compliance during the 2021 ±22 annual reporting period
		Spring peak		End of summer minimum												
		Pref	Abs	Pref	Abs		2012 ± 13	2013 ± 14	2014 ± 15	2015 ± 16	2016 ± 17	2017 ± 18	2018 ± 19	2019 ± 20	2020 ± 21	2021 ± 22	

Wetland	AWRC reference number	Water level criteria (mAHD)				Water level (mAHD)										Status and comments on compliance during the 2021 ±22 annual reporting period
		Spring peak		End of summer minimum												
		Pref	Abs	Pref	Abs		2012 ± 13	2013 ± 14	2014 ± 15	2015 ± 16	2016 ± 17	2017 ± 18	2018 ± 19	2019 ± 20	2020 ± 21	2021 ± 22	
Lake Nowergup	6162567 (Staff) 616145 (telemetered site)	17.0*	16.8			Max	**16.0 4/6 yr**	**16.0 4/6 yr**	**16.0 4/6 yr**	**16.0 4/6 yr**	**16.0 4/6 yr**	**16.0 4/6 yr**	**15.7 4/6 yr**	**15.6 4/6 yr**	**15.6 4/6 yr**	**15.7 4/6 yr**	Compliance and trends: **Non-compliant with absolute spring peak criterion.** Lake levels have been non-compliant in most years since 1996 despite water levels being artificially maintained by the department. Since 2018 the department has used a telemetered site to monitor levels at the lake (AWRC ref. 616145). Levels recorded at the site have been relatively stable since 2018. **Non-compliant with other criterion.** Ecological condition: Water levels have led to the deaths of mature trees and declines in the abundance of the key wetland macrophyte *Baumea articulata*. Low water levels are also contributing to the risk of acidification. Management and mitigation: From work completed as part of the Perth shallow groundwater systems investigation, Searle et al. (2010b) recommended: x the continuation of the supplementation regime x the use of groundwater levels at bore LN2-89 (AWRC ref. 61611247) to relate changes in the watertable to wetland vegetation condition. Minimum levels at bore LN2-89 declined from 2007 to 2016 but rose about 1.5 m in 2017-18 and water levels have been stable over the past few years. The department investigated the causes of groundwater level declines at Lake Nowergup and results showed that local Superficial aquifer use for horticulture had the greatest impact on lake levels, followed by reduced rainfall, then Leederville aquifer pumping from Quinns and Pinjar borefields (Global Groundwater 2015). The *Gnangara groundwater allocation plan* (DWER 2022a) includes reductions in both public and private licensed entitlements across Gnangara resources, including in the vicinity of Lake Nowergup, which modelling projects should, with continued supplementation, help to stabilise water levels at the lake and buffer the lake against the effects of climate change.
						Min	16.0	16.0	16.0	16.0	16.0	16.0	15.1	15			

Wetland	AWRC reference

Wetland	AWRC reference number	Water level criteria (mAHD)				Water level (mAHD)								Status and comments on compliance during the 2021 ±22 annual reporting period
		Spring peak		End of summer minimum										
		Pref	Abs	Pref	Abs		2012 ± 13	2013 ± 14	2014 ± 15	2015 ± 16	2016 ± 17	2017 ± 18	2018 ± 19	2019 ±

Groundwater monitoring bore	AWRC reference number	End of summer absolute minimum (mAHD)	Water levels (mAHD)										Status and comments on compliance during the 2021 ±22 annual reporting period
				2012 t 13	2013 ± 14	2014 ± 15	2015 ± 16	2016 ± 17	2017 ± 18	2018 ± 19	2019 ± 20	2020 ± 21	2021 ± 22	
NR6C	61610982	58.5	Max	59.3	59.7	59.5	59.1	59.5	60.0	59.9				

Appendix B ñ Audit tables: Environmental conditions, procedures and commitments for the Gnangara groundwater resources

Proponent: Department of Water and Environmental Regulation (formerly Department of Water)

Period: 1 July 2018 to 30 June 2022

Table B 1 Ministerial conditions and procedures

Audit code	Subject	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021 ñ22 annual reporting period
819: M 1-1	Implementation	The proponent shall implement the proposals as documented in Section 46 Review of Environmental Conditions on Management of the Gnangara and Jandakot Mounds Stage 1 Proposal for Changes to modified and documented in Environmental Protection Authority Bulletin 1155.	Implement proposals given in EPA Bulletin 1155 and *Ministerial statement no. 819*.	Compliance report	Minister for the Environment		Overall		**Non-compliant** Strategies

Audit code	Subject	Action	How	Evidence	

Audit code	Subject	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021 –22 annual reporting period
819: M 5-2	Management of the water resource	The proponent shall subject to review, every three years, the basis for groundwater management decisions, including groundwater allocations and licences, and the criteria specified for conservation of the environment and the groundwater resource of the Gnangara Mound, to the requirements of the EPA on advice of the Department of Biodiversity, Conservation and Attractions (DBCA), formerly Department of Parks and Wildlife (DPaW).	Present relevant material in annual/triennial reports. Refer draft groundwater management planning reports to the EPA and the DBCA for comment. Make compliance reports publicly available (on the Department of Water and Environmental Regulation website).	Compliance report. Draft groundwater management documents sent to DBCA/EPA for comment. Reports made available on Department of Water (now Department of Water and Environmental Regulation) website.	EPA	DBCA	Overall	Subject to regular review every three years.	**Compliant.** The s are the We regularly review these policies (e.g. statewide policies are reviewed every five years). The *Gnangara groundwater allocation plan: draft for public comment* (DWER 2021) was released or public comment in November 2021. The plan was finalised and released in June 2022 (DWER 2022a). The accompanying *Gnangara groundwater allocation plan: Statement of response* (DWER 2022b) sets out how we responded to issues raised by the public to finalise the plan and how we are working towards managing these issues in implementing the plan. Gnangara plan evaluation statements were completed in 2013 and 2015 (DoW 2013a; DoW 2015). These statements evaluated groundwater resources against 2009 *Gnangara groundwater areas allocation plan* objectives since its release. The website. Gnangara annual and triennial compliance reports are also
819: M 6-1	Groundwater allocation	The proponent shall ensure that the							

Audit code	Subject	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021 -22 annual reporting period
819: M 8-2	Groundwater availability	The proponent shall update annually the figures published according to the requirements of condition 8-1, with the emphasis on those areas of high allocation relative to sustainable yield of the groundwater resource so that limits to use and development can be clearly seen by all interested parties. The updated figures shall also be widely published.	Detail limits on availability relative to sustainable yield (allocation limits) published on the Department of Water and Environmental Regulation website.	Allocation limits made available on the now Department of Water and Environmental Regulation website. Current water availability figures can be obtained from Swan Avon regional office or through the water register.	Minister for the				

Audit code	Subject	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021 –22 annual reporting period
819: M 10-1 2	Research and monitoring	The proponent shall participate in and undertake research and monitoring on the Gnangara Mound which includes: x improvement in the understanding of the relationship between groundwater levels and vegetation, including plantations x to the requirements of the Minister for the Environment on advice of the EPA and the DBCA (formerly DPaW).	Engage in research projects to address this issue, which includes: x improvement in the understanding of the relationship between groundwater levels and vegetation, including plantations.	Compliance report	Minister for the Environment	EPA/ DBCA	Overall		**Compliant** As part of the development of the *Gnangara groundwater allocation plan* (DWER 2022a), the department used PRAMS modelling to simulate groundwater levels under various pines, land use and climate scenarios. Through the Perth shallow groundwater system investigations, we have improved our understanding of the interrelationships between wetlands and the Superficial aquifer and the complex, superimposed impacts of climate change, land use and abstraction. We are using the outcomes to better relate water levels to ecological condition at groundwater-dependent ecosystems. The department commissioned Dr Bea Sommer and Professor Ray Froend of Edith Cowan University to develop a model for determining ecological risk to groundwater-dependent vegetation across the Gnangara groundwater system as the climate changes (Sommer & Froend 2010). The model is based on 30 years of ecological and hydrological monitoring data. It has been an important management tool for assessing the impact of future land and water-use scenarios and for reviewing allocation limits for the draft plan.
819: M 10-1 3	Research and monitoring	The proponent shall participate in and undertake research and monitoring on the Gnangara Mound which includes: x improvement in the understanding of the relationship between groundwater level and abstraction from unconfined and confined aquifers of the Gnangara Mound x to the requirements of the Minister for the Environment on advice of the EPA and the DBCA (formerly DpaW).	Engage in research projects to address this issue, which includes: x improvement in the understanding of the relationship between groundwater level and abstraction from unconfined and confined aquifers of the Gnangara Mound.	Compliance report	Minister for the Environment	EPA/ DBCA	Overall		**Compliant** The department is using PRAMS modelling to improve understanding of the relationship between groundwater level and abstraction from unconfined and confined aquifers of the Gnangara system. The PRCAC study used robust and established science coupled with innovative research to improve our understanding of the deep Leederville and Yarragadee aquifers in the Perth region. Perth shallow groundwater system investigations have derstanding of the interrelationships between wetlands and the Superficial aquifer and the complex, superimposed impacts of climate change, land use and abstraction. The department is using the outcomes to limit abstraction impacts on groundwater-dependent ecosystems.
819: M 10-1 4	Research and monitoring	The proponent shall participate in and undertake research and monitoring on **the** Gnangara Mound which includes: x							

the

Table B 2 The proponent's (Department of Water, now Department of Water and Environmental Regulation) environmental management conditions

Audit code	Subject	Objective	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021–22 annual reporting period
819: P 1	Gnangara Mound allocations	Sustainable use of groundwater from the Gnangara Mound (Superficial aquifer).	Manage public and private groundwater abstraction to meet objectives and Environmental Water Provisions (EWP) criteria							

Audit code	Subject	Objective	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021–22 annual reporting period
819: P 6 1	Environmental monitoring program									

Audit code	Subject	Objective	Action	How	Evidence	Require-ment of	On advice from	Phase	When/ Where	Status and further information for the 2021 –22 annual reporting period
819: P 10	Vegetation protection	Limit environmental impact tree deaths.	Limit potential for tree deaths around production wells to 100 metres radius for normal (average) climate conditions and within 200 metres to extreme conditions.	Considered in the Water Corporation operating strategy.	Compliance report	Minister for Environment		Overall		**Compliant.** The department has classified the sensitivity of each public water supply bore based on its

Appendix C ñ History of Ministerial statements for the Gnangara Mound

The importance of managing abstraction from the Gnangara Mound to protect groundwater-dependent ecosystems was formally recognised in the late 1980s. The EPA proposed conditions on Gnangara groundwater abstraction in 1986 when the Gnangara Mound water resources environmental review and management program

References

Bamford M & Everard C 2021, *Frog Monitoring on the Gnangara Mound: 2003 – 2020,* Prepared for the Department of Water and Environmental Regulation, MJ & AR Bamford, Consulting Ecologists, Kingsley, Western Australia.

Bates BC, Chandler RE, Charles SP & Campbell EP 2010, *Assessment of apparent nonstationarity in time series of annual inflow, daily precipitation, and atmospheric circulation indices: A case study f*

2015,

Department of Water and Environmental Regulation